


Modular Multiples®


Linears®

COPTER 3C HO: LED Surface Profiles

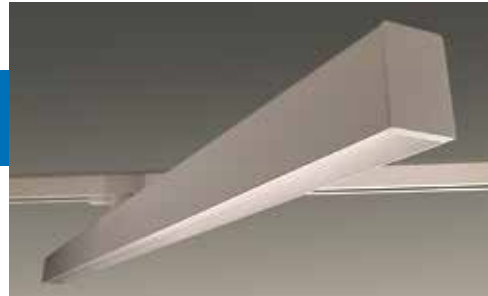

Description: 359° rotatable track mounted fixture. Aluminum extruded linear profile, white or black powder coated finish, with opal polycarbonate diffuser. Additional spacer that can be ordered separately (see "Options" below) that allows the adjoining fixture to be placed at a slightly lower elevation so that two different fixtures can be hung next to each other without interference. Non-dimming driver standard (consult factory for dimmable driver options) Available in 2700k, 3000k or 4000k

- Technical Data:**
- Application: Track mounted fixture (Global Pro 3 Circuit Track)
 - Dimensions: 45-3/8" (1153mm) x 1-5/8" (40mm) x 2-1/4" (57mm)
 - Power: 110-240v
 - Lifetime L70: ~58,000 hours
 - Finish: Powder coat -W (white), -B (black) standard (custom colors available, consult factory)

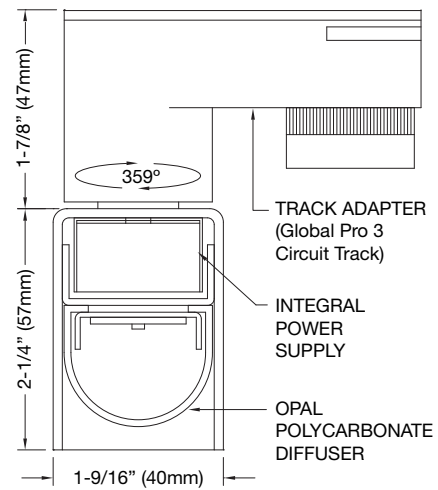

Availability:

Model #	Color Temp	Wattage	Lumen	Lumen/Watt	CRI
#MODLSP-U59-HO-PD-27-1685- x	2700°K	49w	5560 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1404- x	3000°K	53w	6200 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1123- x	4000°K	53w	6400 lm	131 lm/w	80+

Options: Copter Spacer #63SP-x 2-3/8" (63mm) spacer -W (white) or -B (black)