

Modular International, Inc.


Linears®
LED Surface
Profiles



Modular Multiples®


1

Linears® COPTER 3C HO: LED Surface Profiles

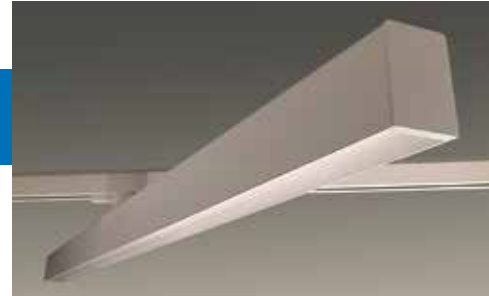

Description: 359° rotatable track mounted fixture. Aluminum extruded linear profile, white or black powder coated finish, with opal polycarbonate diffuser. Additional spacer that can be ordered separately (see “Options” below) that allows the adjoining fixture to be placed at a slightly lower elevation so that two different fixtures can be hung next to each other without interference. Non-dimming driver standard (consult factory for dimmable driver options) Available in 2700k, 3000k or 4000k

- Technical Data:**
- Application: Track mounted fixture (Global Pro 3 Circuit Track)
 - Dimensions: 45-3/8” (1153mm) x 1-5/8” (40mm) x 2-1/4” (57mm)
 - Power: 110-240v
 - Lifetime L70: ~58,000 hours
 - Finish: Powder coat -W (white), -B (black) standard (custom colors available, consult factory)

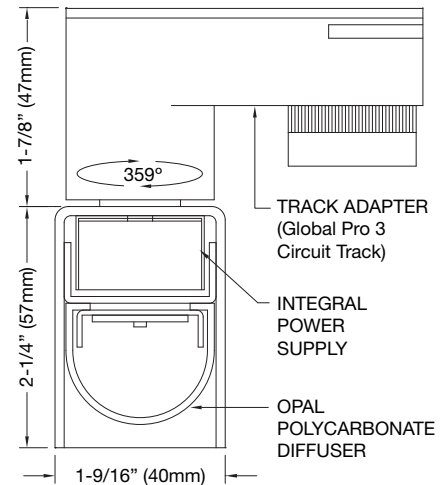

Availability:

Model #	Color Temp	Wattage	Lumen	Lumen/Watt	CRI
#MODLSP-U59-HO-PD-27-1685- x	2700°K	49w	5560 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1404- x	3000°K	53w	6200 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1123- x	4000°K	53w	6400 lm	131 lm/w	80+

Options: Copter Spacer #63SP-x 2-3/8” (63mm) spacer -W (white) or -B (black)

The Original Multiple Lamp Family of Fixtures



Modular Multiples®


2

Linears®
U59 HO PD: LED Surface Profiles



Description: Aluminum extruded linear profile, white, black or aluminum powder coated finish, with opal polycarbonate diffuser. Non-dimming driver standard (consult factory for dimmable driver options) Available in 2700k, 3000k or 4000k

- Technical Data:**
- Application: Ceiling, wall, pendant or cable mounted
 - Dimensions: length x 2-3/8" (59mm) x 3-5/32" (80mm)
 - Power: 110-240v
 - Lifetime L70: ~58,000 hours
 - Finish: Powder coat -W (white), -B (black), -A (aluminum) standard (custom colors available, consult factory)

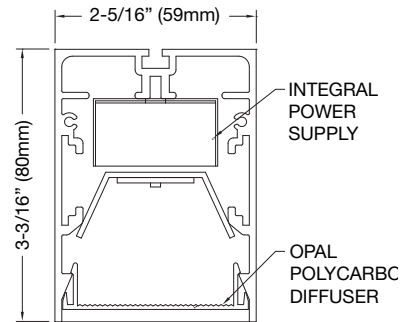

Availability:

PROFILE WITH POLYCARBONATE DIFFUSER

Model #	Length	Color Temp	Wattage	Lumen	Lumen/Watt	CRI
#MODLSP-U59-HO-PD-27-1685- x	5'6" (1685mm)	2700°K	73w	8340 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1404- x	4'7" (1404mm)	2700°K	61w	6950 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-1123- x	3'8" (1123mm)	2700°K	49w	5560 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-0842- x	2'9" (842mm)	2700°K	37w	4170 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-27-0562- x	1'10" (562mm)	2700°K	25w	2780 lm	131 lm/w	80+
#MODLSP-U59-HO-PD-30-1685- x	5'6" (1685mm)	3000°K	79w	9300 lm	135 lm/w	80+
#MODLSP-U59-HO-PD-30-1404- x	4'7" (1404mm)	3000°K	66w	7750 lm	135 lm/w	80+
#MODLSP-U59-HO-PD-30-1123- x	3'8" (1123mm)	3000°K	53w	6200 lm	135 lm/w	80+
#MODLSP-U59-HO-PD-30-0842- x	2'9" (842mm)	3000°K	40w	4650 lm	135 lm/w	80+
#MODLSP-U59-HO-PD-30-0562- x	1'10" (562mm)	3000°K	26w	3100 lm	135 lm/w	80+
#MODLSP-U59-HO-PD-40-1685- x	5'6" (1685mm)	4000°K	79w	9600 lm	140 lm/w	80+
#MODLSP-U59-HO-PD-40-1404- x	4'7" (1404mm)	4000°K	66w	8000 lm	140 lm/w	80+
#MODLSP-U59-HO-PD-40-1123- x	3'8" (1123mm)	4000°K	53w	6400 lm	140 lm/w	80+
#MODLSP-U59-HO-PD-40-0842- x	2'9" (842mm)	4000°K	40w	4800 lm	140 lm/w	80+
#MODLSP-U59-HO-PD-40-0562- x	1'10" (562mm)	4000°K	26w	3200 lm	140 lm/w	80+

Options:

90° CORNER	#MODLSP-U59-HO-PD-90
180° STRAIGHT CONNECTOR	#MODLSP-U59-HO-PD-180
SUSPENSION CABLE 5' (1.6M)	#MODLSP-U59-HO-PD-CABLE1.6
SUSPENSION CABLE 20' (6.0M)	#MODLSP-U59-HO-PD-CABLE6.0

The Original Multiple Lamp Family of Fixtures




Linears® U59 HO PL: LED Surface Profiles



Description: Aluminum extruded linear profile, white, black or aluminum powder coated finish, with parabolic louver. Non-dimming driver standard (consult factory for dimmable driver options)
Available in 2700k, 3000k or 4000k

- Technical Data:**
- Application: Ceiling, wall, pendant or cable mounted
 - Dimensions: length x 2-3/8" (59mm) x 3-5/32" (80mm)
 - Power: 110-240v
 - Lifetime L70: ~58,000 hours
 - Finish: Powder coat -W (white), -B (black), -A (aluminum) standard (custom colors available, consult factory)

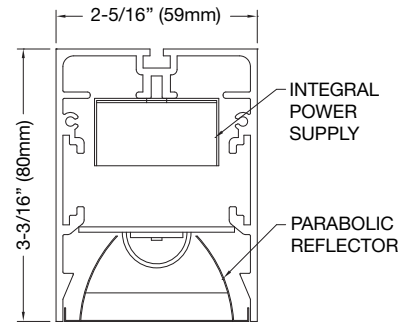

Availability:

PROFILE WITH PARABOLIC LOUVER

Model #	Length	Color Temp	Wattage	Lumen	Lumen/Watt	CRI
#MODLSP-U59-HO-PL-27-1685- x	5'6" (1685mm)	2700°K	73w	8340 lm	131 lm/w	80+
#MODLSP-U59-HO-PL-27-1404- x	4'7" (1404mm)	2700°K	61w	6950 lm	131 lm/w	80+
#MODLSP-U59-HO-PL-27-1123- x	3'8" (1123mm)	2700°K	49w	5560 lm	131 lm/w	80+
#MODLSP-U59-HO-PL-27-0842- x	2'9" (842mm)	2700°K	37w	4170 lm	131 lm/w	80+
#MODLSP-U59-HO-PL-27-0562- x	1'10" (562mm)	2700°K	25w	2780 lm	131 lm/w	80+
#MODLSP-U59-HO-PL-30-1685- x	5'6" (1685mm)	3000°K	86w	8910 lm	135 lm/w	80+
#MODLSP-U59-HO-PL-30-1404- x	4'7" (1404mm)	3000°K	71w	7425 lm	135 lm/w	80+
#MODLSP-U59-HO-PL-30-1123- x	3'8" (1123mm)	3000°K	57w	5940 lm	135 lm/w	80+
#MODLSP-U59-HO-PL-30-0842- x	2'9" (842mm)	3000°K	43w	4455 lm	135 lm/w	80+
#MODLSP-U59-HO-PL-30-0562- x	1'10" (562mm)	3000°K	29w	2970 lm	135 lm/w	80+
#MODLSP-U59-HO-PL-40-1685- x	5'6" (1685mm)	4000°K	86w	9720 lm	140 lm/w	80+
#MODLSP-U59-HO-PL-40-1404- x	4'7" (1404mm)	4000°K	71w	8100 lm	140 lm/w	80+
#MODLSP-U59-HO-PL-40-1123- x	3'8" (1123mm)	4000°K	57w	6480 lm	140 lm/w	80+
#MODLSP-U59-HO-PL-40-0842- x	2'9" (842mm)	4000°K	43w	4860 lm	140 lm/w	80+
#MODLSP-U59-HO-PL-40-0562- x	1'10" (562mm)	4000°K	29w	3240 lm	140 lm/w	80+

Options:

90° CORNER	#MODLSP-U59-HO-PL-90
180° STRAIGHT CONNECTOR	#MODLSP-U59-HO-PL-180
SUSPENSION CABLE 5' (1.6M)	#MODLSP-U59-HO-PL-CABLE1.6
SUSPENSION CABLE 20' (6.0M)	#MODLSP-U59-HO-PL-CABLE6.0

Modular Multiples®



Modular International Inc.
 3941 California Avenue
 Pittsburgh, PA 15212
 1-412-734-9000
www.modularinternational.com

This brochure contains products covered under one or more of the following US Patent Numbers:

6,170,965B1	6,234,644	6,511,208B1	6,568,826B1
6,634,764B2	6,692,139B2	6,820,999B2	7,207,698B2
6,896,391B2	6,969,182B2	6,997,267B2	6,997,574B2
7,036,953B2	6,745,785B2	7,300,176B2	7,478,921B1
D520,666S	D530,038S	D537,553S	

Modular International, Inc. produced a major portion of the lighting for the project shown on the enclosed photographs. The photographs, however, are not intended to imply that the various owners of the projects endorse our products or use our products exclusively.

