

Modular Multiples®

Apertures®
Recessed
Trimless
New / Old Work



Modular International Inc.
3941 California Avenue
Pittsburgh, PA 15212
1-412-734-9000
www.modularinternational.com

This leaflet contains products covered under one or more of the following US Patent Numbers:

6,568,826B1	6,692,139B2	6,820,999B2	7,207,698B2
6,896,391B2	6,969,182B2	6,997,267B2	6,997,574B2
7,036,953B2	6,745,785B2	7,300,176B2	7,478,921B1
D520,666S	D530,038S	D537,553S	D819,857
D818,632	D818,624	D818,623	8,740,407
8,511,860	8,231,242	8,210,720	7,832,907

Modular International, Inc. produced a major portion of the lighting for the project shown. The photograph, however, is not intended to imply that the various owners of the projects endorse our products or use our products exclusively.

Modular Multiples®

1

Apertures®

Recessed - Trimless - New / Old Work



Configurations: 1, 2, 3, 4 light units standard, round, square, rectangular apertures, with a standard throat depth of 1-1/2" customs available - patented

Housing:

- Fabricated 18 gauge steel housing connected to preformed panel with tape edge on all sides that mates to 5/8" drywall or plaster
- Patented die-cast aluminum ring sets
- Optional patented locking device for ring sets
- Capable of holding 2 filter media up to 1/8" thick each
- Available with pull down yoke to increase horizontal adjustment - consult factory for further information

Finishes:

- Housing and ring sets powder coated - white or black standard
- Custom colors available
- Stainless steel / satin nickel available
- Panel provided with a white primer finish

Electrical:

- Internal electronic power supply(s) / transformer(s) / ballast(s) accessible through the aperture of the fixture
- Dimmable (not applicable on HID products)
- One power supply / transformer per lamp allowing for multi-circuit wiring
- 120v and 277v available
- Listed to UL1598 standards

Light Sources:

LED:


- 16w Module - 640 Lumens - 3000°K - 98CRI 14° - 21° - 34° (-LED/16)
- 30w Module - 1200 Lumens - 3000°K - 98CRI 14° - 21° - 34° (-LED/30)

LED Direct Replacement or Legacy Lamps:

MR16LED (-BLD)	MR16 HALOGEN (-B)	MR16CMH (-BH)
AR111LED (-DLD)	AR111 HALOGEN (-D)	CDMR111 (-S)
PAR30LED (-GLD)	PAR30 (-G)	PAR30HID (-H)
PAR38LED (-JLD)	PAR38 (-J)	PAR38HID (-K)



[Download CSI drop-in specifications template](#)

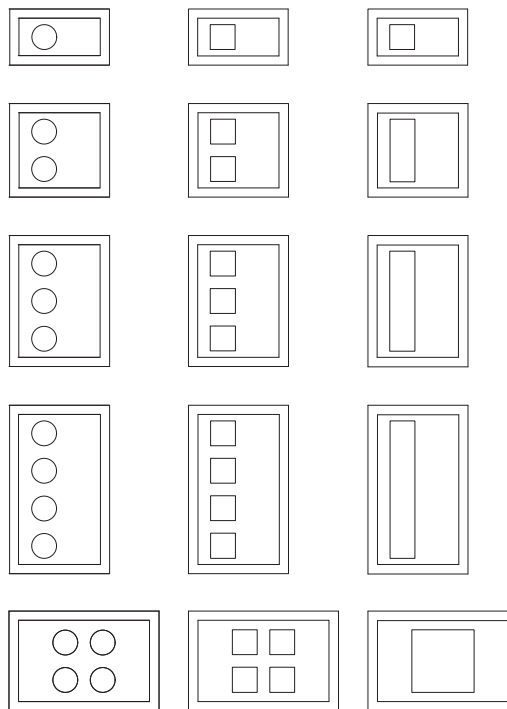

Model # example: MAS 2 BLD x TI - RD

